



L/min-Portate

L/min-Flow rate


Art- 63521-63321-64521
Item- 63521-63321-64521

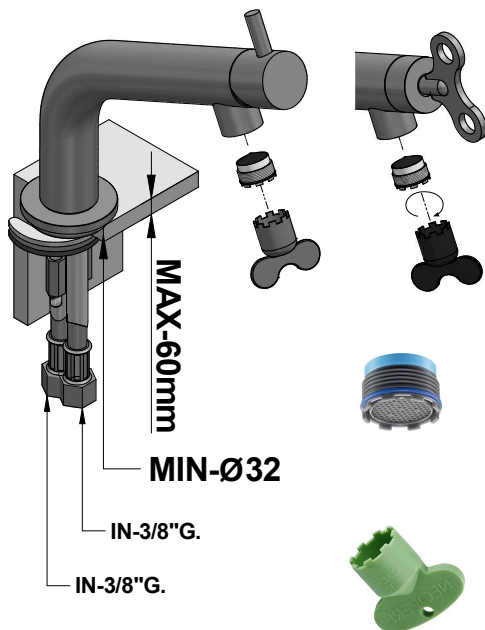






Art- 63522-63322-64522
Item- 63522-63322-64522

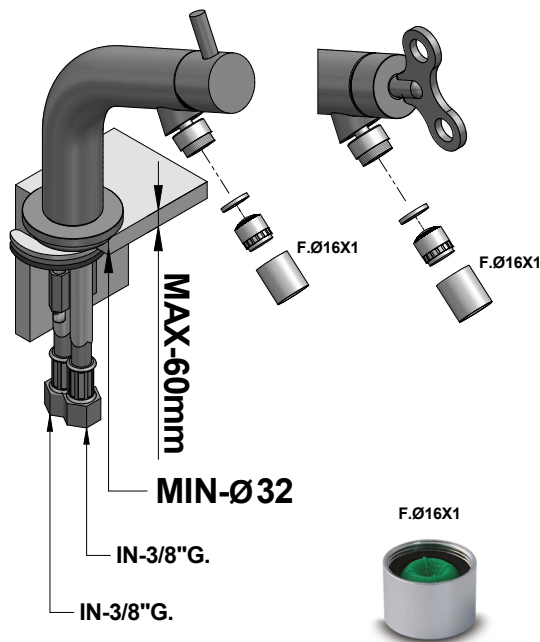

Art- 63532-63332-64532
Item- 63532-63332-64532

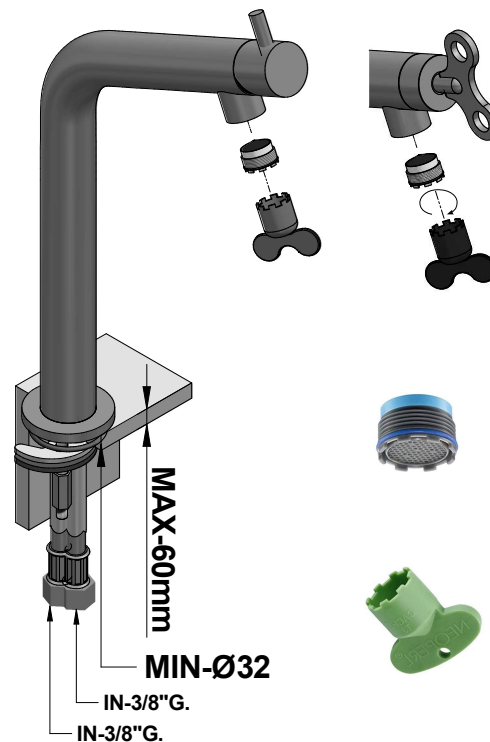

Art- 63580-63380-64580
Item- 63580-63380-64580

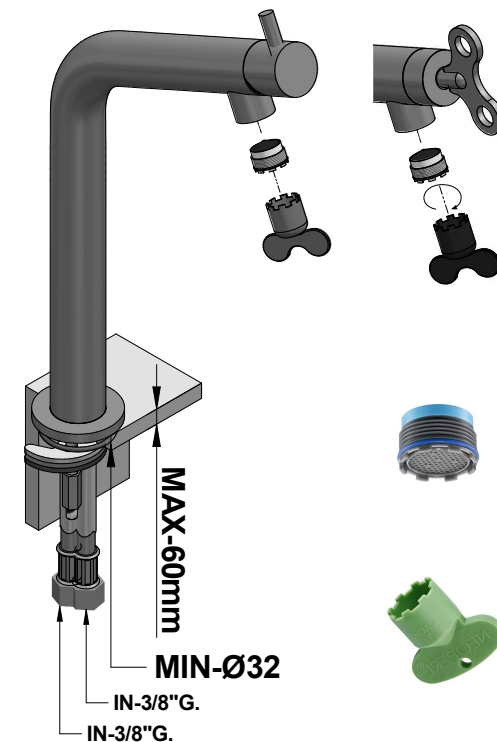

PRESSIONE MINIMA DI SERVIZIO :.....0,5 bar
PRESSIONE DI SERVIZIO MASSIMA :.....5 bar
PRESSIONE D'USO CONSIGLIATA :.....3 bar
TEMPERATURA ACQUA CALDA MAX :.....80°C
TEMPERATURA ACQUA CALDA CONSIGLIATA :.....60°C

In caso di pressione d'esercizio superiore a 5 bar è consigliabile installare un riduttore di pressione sulle tubature di alimentazione.

MINIMUM WORKING PRESSURE:.....0,5 bar
MAX OPERATING PRESSURE :.....5 bar
RECOMMENDED OPERATION PRESSURE :.....3 bar
MAX HOT WATER TEMPERATURE :.....80°C
RECOMMENDED HOT WATER TEMPERATURE :.....60°C

In case of operating pressures higher than 5 bar it is recommended to install a pressure reducer on the feeding tubes.

L/min-Portate per
Art- 64521-64522-
64532-64580-
63521-63321-
63522-63322-
63532-63332-
63580-63380

L/min-Flow rate for
item - 64521-64522-
64532-64580-
63521-63321-
63522-63322-
63532-63332-
63580-63380

bongio

Mario Bongio s.r.l.
Via Aldo Moro, 2
28017 San Maurizio d'Opaglio (NO) - Italy
tel: +39 0322 967248 fax: +39 0322 950012
www.bongio.com - info@bongio.it

© Copyright of Mario Bongio s.r.l.