
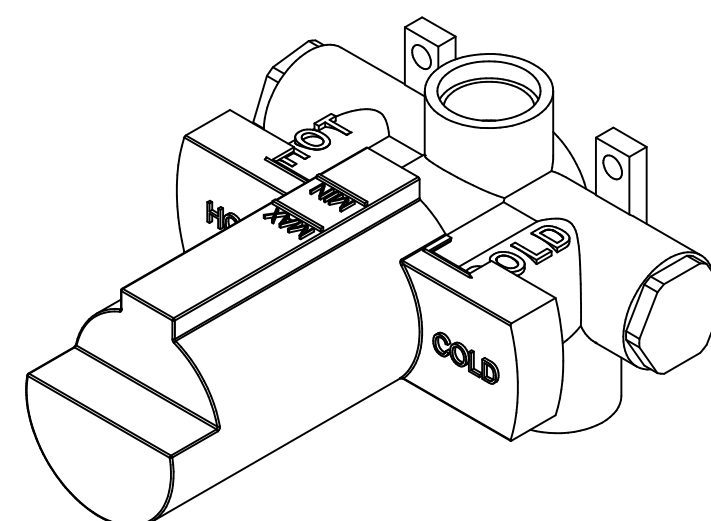
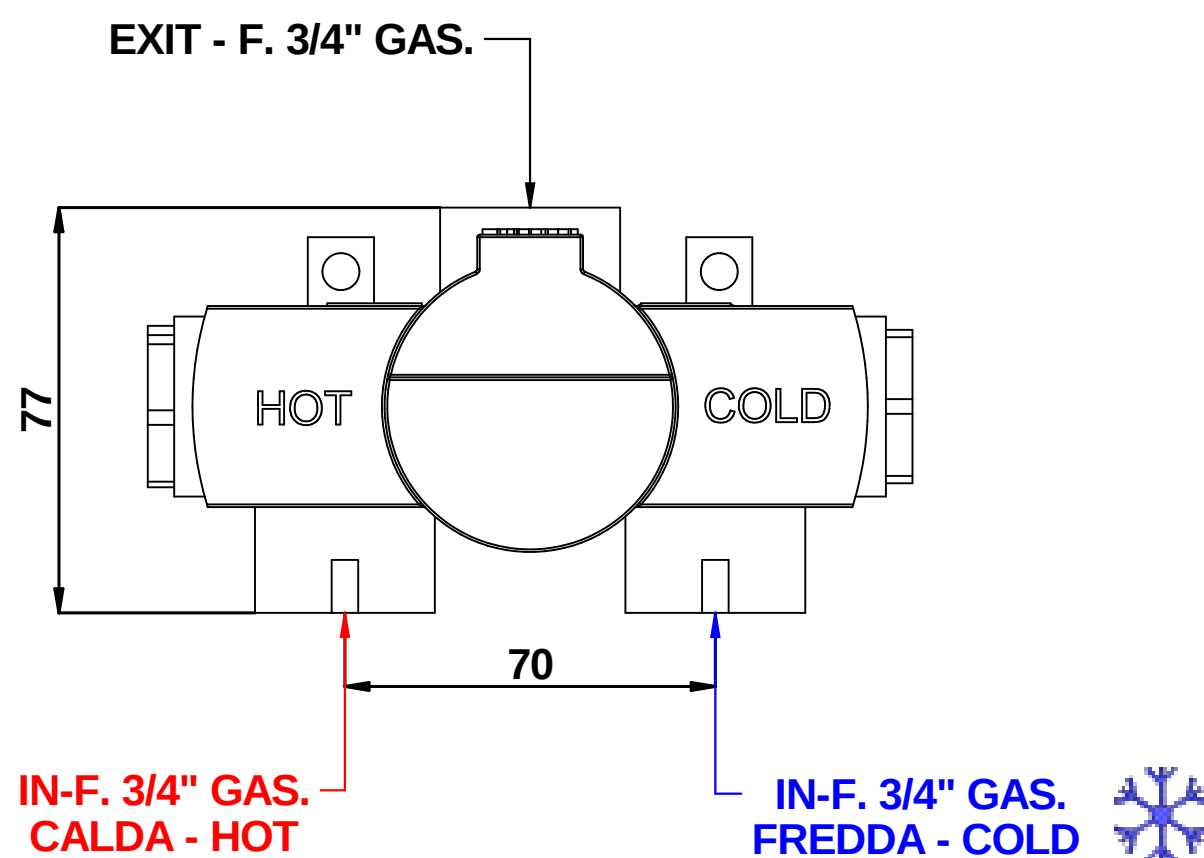
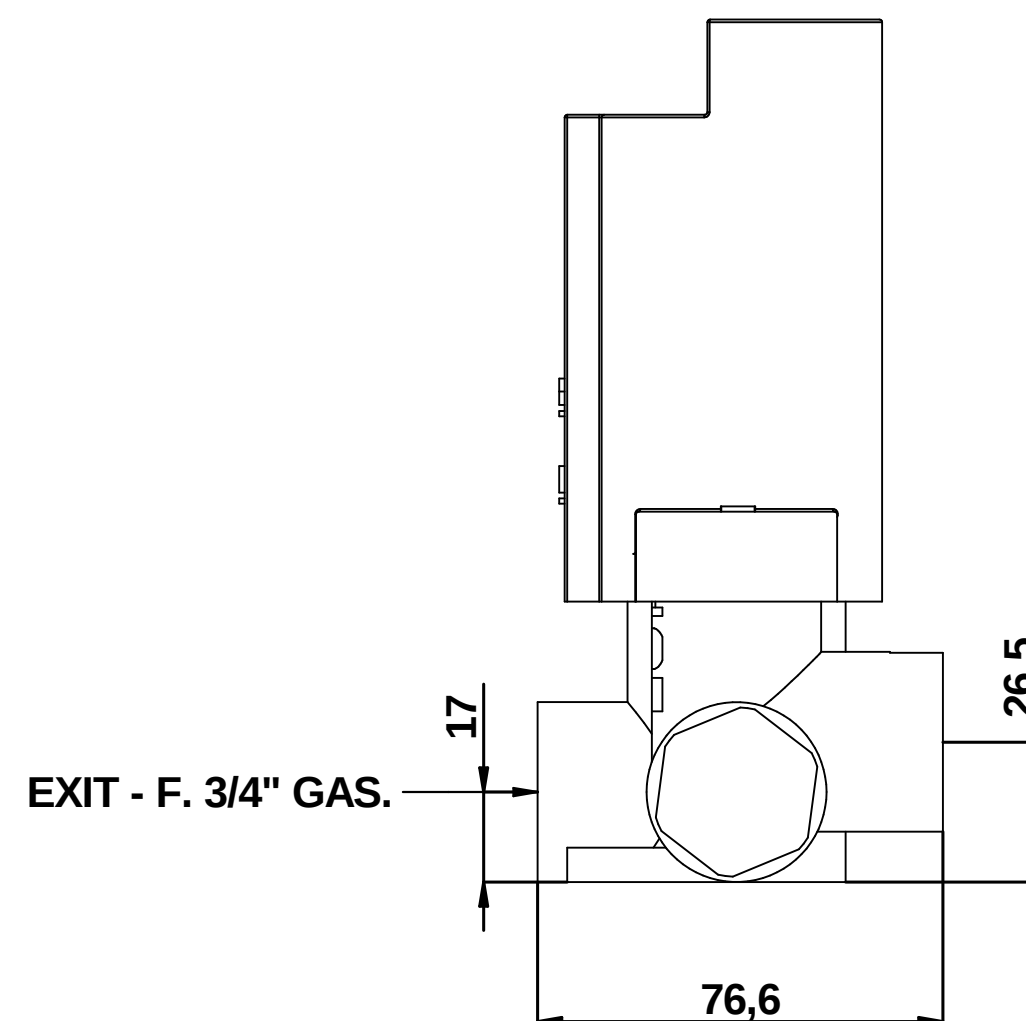


MIN-42mm -- MAX 60mm

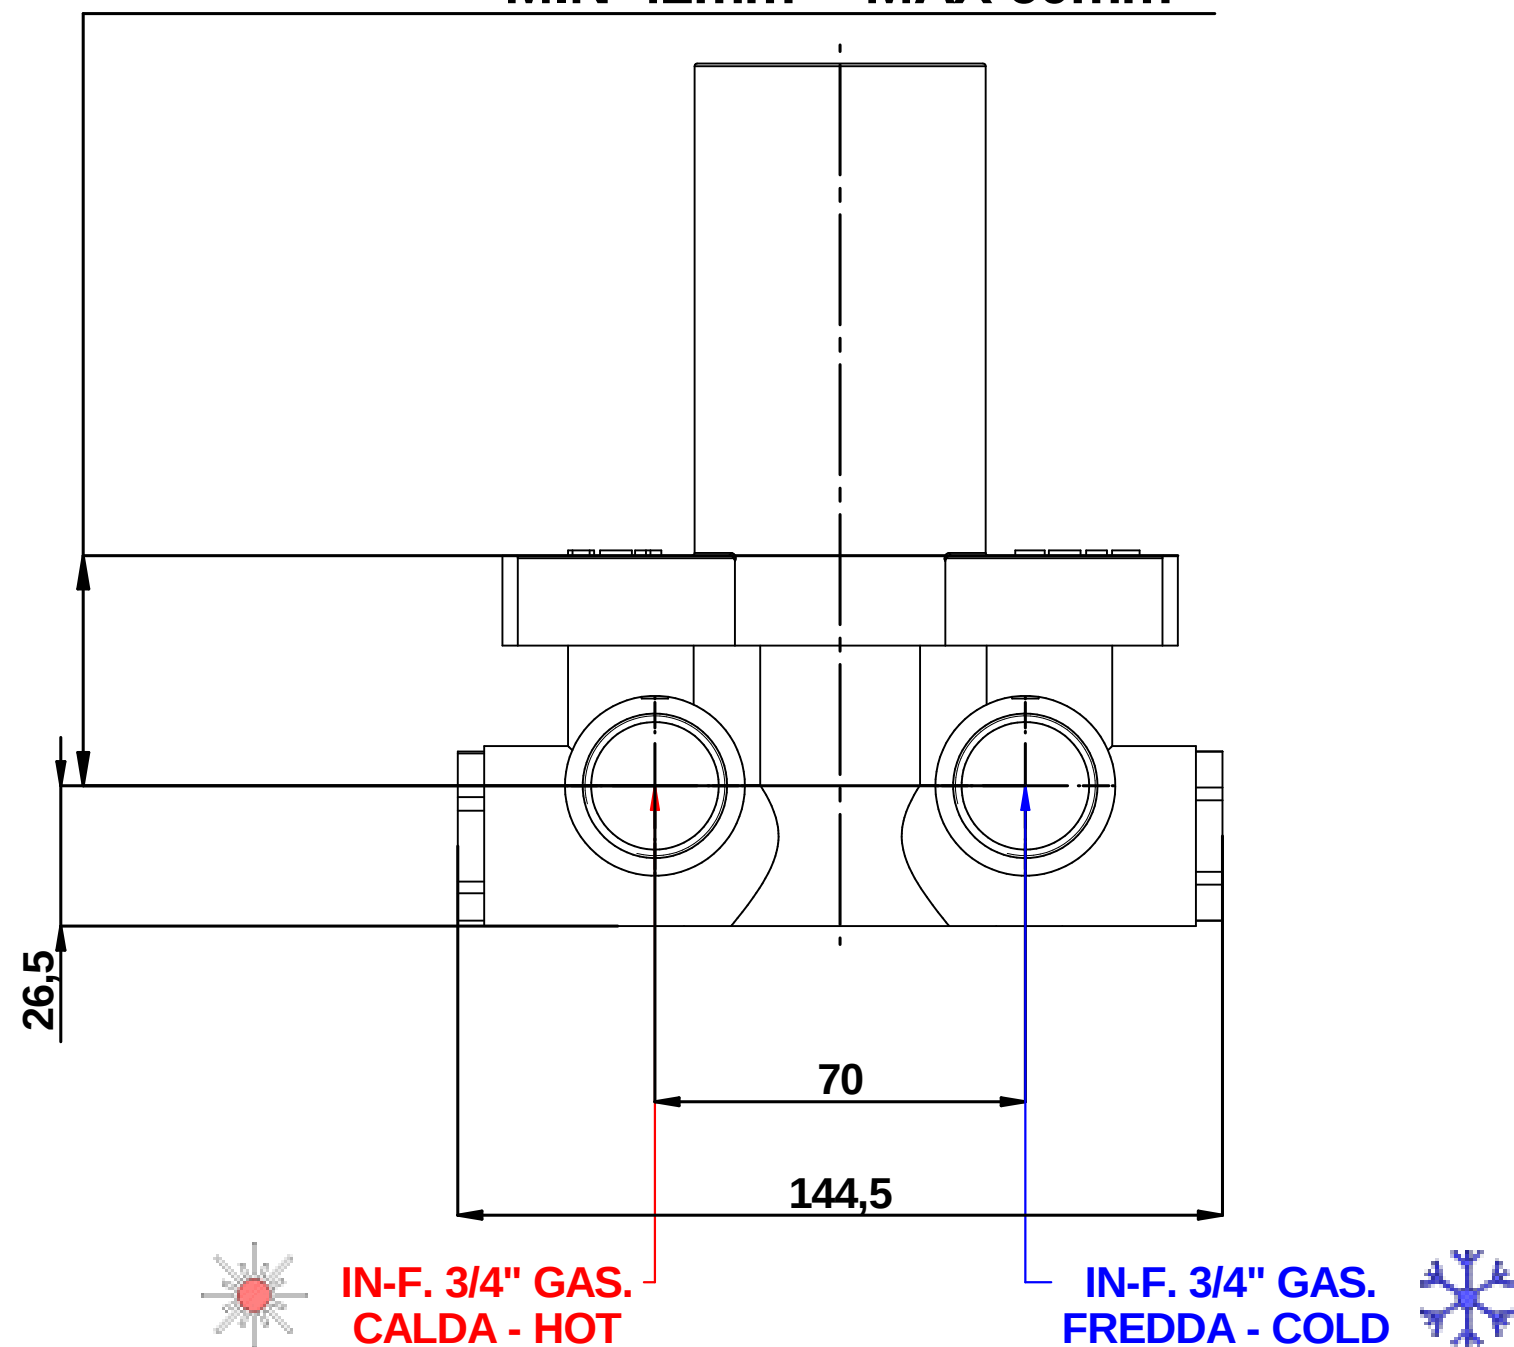

SPECIFICHE DI UTILIZZO

Temperatura di utilizzo dell' acqua calda
massima : 85°C
minima : 5°C più alta di quella minima richiesta come miscelata
consigliata : 65°C
Minima differenza tra temperatura calda e fredda 10°C

Pressioni di servizio

massima : 5 bar
minima : 1 bar
Le pressioni di utilizzo dovrebbero essere il più bilanciate possibile per ottenere il massimo dell'efficianza.
Quando le pressioni in entrata sono superiori a 5 bar, dei riduttori di pressione dovrebbero essere installati a monte del miscelatore.

GENERAL CHARACTERISTICS

In the case of instantaneous heaters, hot water flow has to at least meet the minimum flow required by heater and maintain burning.
(specified by heater manufacture)


OPERATING SPECIFICATIONS

Hot water supply temperature:
Maximum: 85°C
Minimum: 5°C higher than maximum required mixed temperature
Advisable: 65°C
Minimum difference between hor and mixed temperature is 10 °C

Operating pressures

Maximum: 5 bar
Minimum: 0.1 bar
Operating pressure (on hot and cold line) should be kept as balanced as possible in order to assure maximum efficiency.
When the pressure is higher than a 5 bar a pressure reducer is required to be fitted before valve.

PORTATE A PRESSIONE DINAMICA SENZA LIMITATORE FLOW RATES DYNAMIC PRESSURE WITHOUT LIMITATION SYSTEM

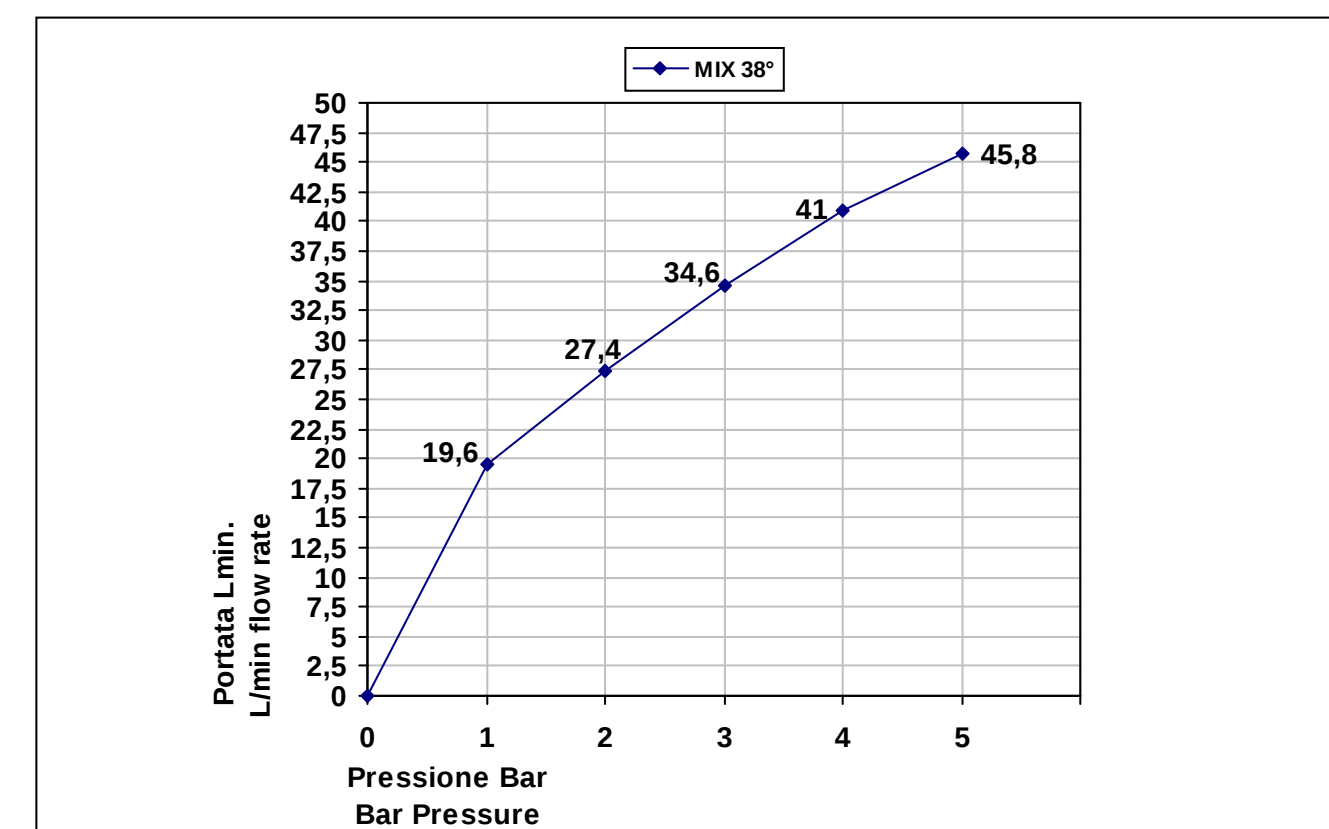

REVISIONE
00 DEL 2025

9701

CORPO INCASSO

Corpo termostatico incasso 3/4"
SENZA CHIUSURA
x art. 73554

Thermostatic built-in body
WITHOUT LOCK
for 73544

bongio

Mario Bongio s.r.l.
Via Aldo Moro, 2
28017 San Maurizio d'Opaglio (NO) - Italy
tel: +39 0322 967248 fax: +39 0322 950012
www.bongio.com