

SPECIFICHE DI UTILIZZO


Temperature di utilizzo dell'acqua calda:
 Massima: 85°C
 Minima: 5°C più alta di quella minima richiesta come miscelata.
 Consigliata 65°C
 Minima differenza tra temperatura calda e fredda 10°C
 Pressioni di esercizio
 Massima: 5 Bar
 Minima: 0.1 Bar
 Le pressioni di utilizzo dovrebbero essere mantenute il più bilanciate possibile per ottenere il massimo dell'efficienza.
 Quando le pressioni in entrata sono superiori a 5 Bar, dei riduttori di pressione dovrebbero essere installati a monte del miscelatore.

GENERAL CHARACTERISTICS


In the case of instantaneous heaters, hot water flow has to at least meet the minimum flow required by heater and maintain burning.
 (Specified by heater manufacture)
OPERATING SPECIFICATIONS
 Hot water supply temperature:
 Maximum: 85°C
 Minimum: 5°C Higher than maximum required mixed temperature.
 Advisable 65°C.
 Minimum difference between hot and mixed temperature is 10°C.
 Operating Pressure
 Maximum 5 Bar
 Minimum 0.1 Bar
 Operating pressure (on hot and cold line) should be kept as balanced as possible in order to assure maximum efficiency.
 When the pressure is higher than a 5 Bar a pressure reducer is required
 To be fitted before valve.


IN F.3/4" G.
FREDDA - COLD


IN F.3/4" G.
CALDA - HOT

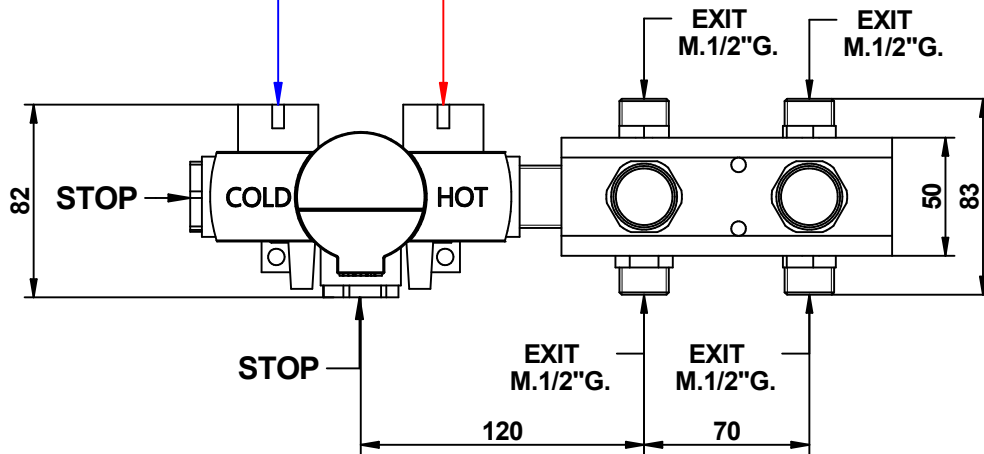

PORTATE A PRESSIONE DINAMICA SENZA LIMITATORE
FLOW RATES AT DYNAMIC PRESSURE WITHOUT LIMITATION SYSTEM

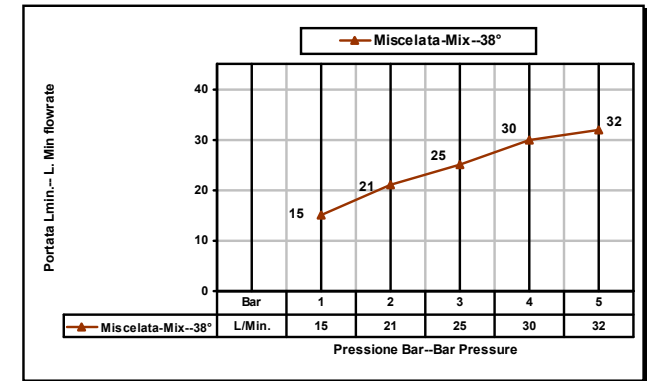

Cod. 09730/2

Corpo incasso per art.: Built-in body for items:

Copyright of Mario Bongio s.r.l. & (' ! \$ * ! *) ! * * ! \$) ! \$ (! % / % & ! \$ &) (& \$ &

bongio

Mario Bongio s.r.l.
 Via Aldo Moro, 2
 28017 San Maurizio d'Opaglio (NO) - Italy
 tel: +39 0322 967248 fax: +39 0322 950012
 www.bongio.com